




DEAD BOLT

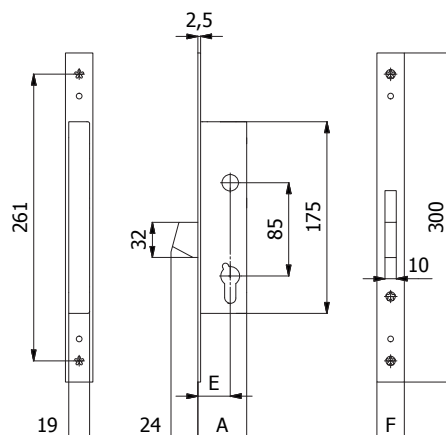

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy self-centering dead bolt with lock-picking system.

WORKING:

Key driven dead bolt.

HAND:

No hand.

PROVIDED WITH:

Forend spacer cod. 0623 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), stainless steel fixing screws, assembling instructions.

For series 1401: 2 roses cod. 0120 N, cylinder screw.

For series 3401: Cylinder screw.

For series 4401: Cross key cylinder cod. 4052 or 4052/1 (with long keys), 3 keys, 2 roses cod. 0441 N.

COD.	E	F	A	Throws	Cylinder	Key	kg		
1401.25.22	25	22	40	1			0,51	1	5
1401.25.25	25	25	40	1			0,49	1	5
1401.30.22	30	22	45	1		-	0,54	1	5
1401.30.25	30	25	45	1			0,52	1	5
1401.35.22	35	22	50	1			0,57	1	5
1401.35.25	35	25	50	1			0,55	1	5
3401.30.22	30	22	45	1	Swiss profile cylinder		0,51	1	5
3401.30.25	30	25	45	1	Swiss profile cylinder		0,49	1	5
3401.35.22	35	22	50	1			0,54	1	5
3401.35.25	35	25	50	1			0,52	1	5
4401.25.22	25	22	40	1			0,60	1	5
4401.25.25	25	25	40	1			0,58	1	5
4401.30.22	30	22	45	1	cod. 4052	cod. 4100	0,64	1	5
4401.30.25	30	25	45	1			0,62	1	5
4401.35.22	35	22	50	1			0,66	1	5
4401.35.25	35	25	50	1			0,64	1	5
4401/1.**.**		Long keys			cod. 4052/1	cod. 4101	+ 0,02	-	-